



IBM Compatible

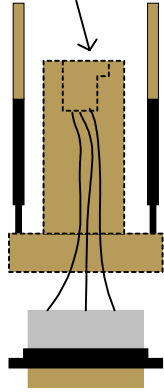


DB-9 to RJ-45 Converter

Straight Cable

Maximum of 50ft.




Hand Punch Terminal






Dsub 9p

RJ-45



RJ-45



Wire the DB-9 to RS-232 connector as shown in the diagram. This is the only custom wiring that is necessary.

The DB-9 to RS-232 connector will fit onto the com port at the PC.

The cable from the connector to the terminal is straight through.

J4 on the Hand Punch terminal is an RJ-45 type vertical connector which transmits RS-232 signals. Connect the straight cable here.

Turn terminating resistors 1 & 2 ON at the terminal on the S1 jumper block.

Use Password 2 in clock menu for setup. Go to "Set Serial," enter matching baud rate for RS-232 and select #1 for Host. **Do not use #0 for Printer**

AMANO

TITLE: Hand Punch New Style with RS-232 Connection

Revised 04/18/2002

COMPANY: AMANO Cincinnati, Inc.

CREATOR: Chad McFarlin

DATE: 09/17/1996

TIME: 2:47:51 PM

PG: 1

OF 1

PGS

FILENAME: HandPunchNew232.vsd